



## Pro-9250 / Pro-9650

HIGH RESOLUTION

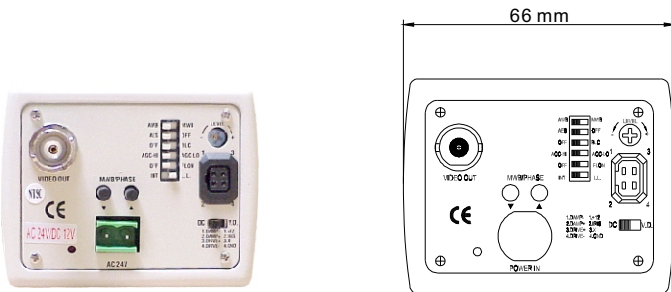

Rear View

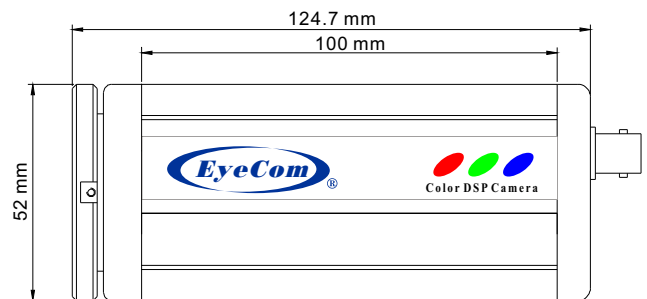

### FEATURES

Adopting 1/3" Super HAD CCD, these cameras automatically switch color in day, to high sensitivity B/W at night. Digital Signal Processing (DSP)

#### Pro-9250

- SONY 1/3" Super HAD CCD sensor
- 380 TV Lines of Horizontal Resolution
- Minimum illumination of 0.1 Lux
- AES, AI, AGC, AWB, MWB, BLC, FL, Line Lock

#### Pro-9650

- High Resolution SONY 1/3" Super HAD CCD sensor
- 470 TV Lines of Horizontal Resolution
- Minimum illumination of 0.2 Lux
- AES, AI, AGC, AWB, MWB, BLC, FL, Line Lock

### SPECIFICATION

Model Number	PRO-9250	PRO-9650
Image Pick-up Device	SONY 1/3" super HAD CCD sensor	SONY 1/3" HR super HAD CCD sensor
Effective Picture Element	NTSC: 510(H)x492(V)	NTSC: 768(H)x494(V)
Horizontal Resolution	380 TV lines	470 TV lines
Minimum Illumination	0.1 LUX @ F1.2	0.2 LUX @ F1.2
Color turns into B/W (Approx.)	Illumination < 1~3 Lux @ F1.2	
S/N Ratio	More than 48dB	
Auto Electronic Shutter	NTSC: 1/60s~1/100,000s	
Auto Iris Control	Video-Drive Lens & DC-Drive Lens both supported	
Flickerless Mode	NTSC: 1/100s, PAL: 1/120s ON/OFF switchable	
Gamma Characteristic	0.45	
Lens Mount	C or CS mount adjustable	
Auto Gain Control	High / Low switchable	
Auto White Balance	ATW (Auto) / MWB (Manual) switchable	
Back Light Compensation	ON/OFF switchable	
Synchronous System	Internal, Negative Sync. / External Line Lock	
Power Supply	12V DC + 24V AC (Dual Voltage)	
Operating Temperature	-10 °C ~ 50 °C (14 °F ~ 122 °F)	

\*Specifications subject to change without notice